
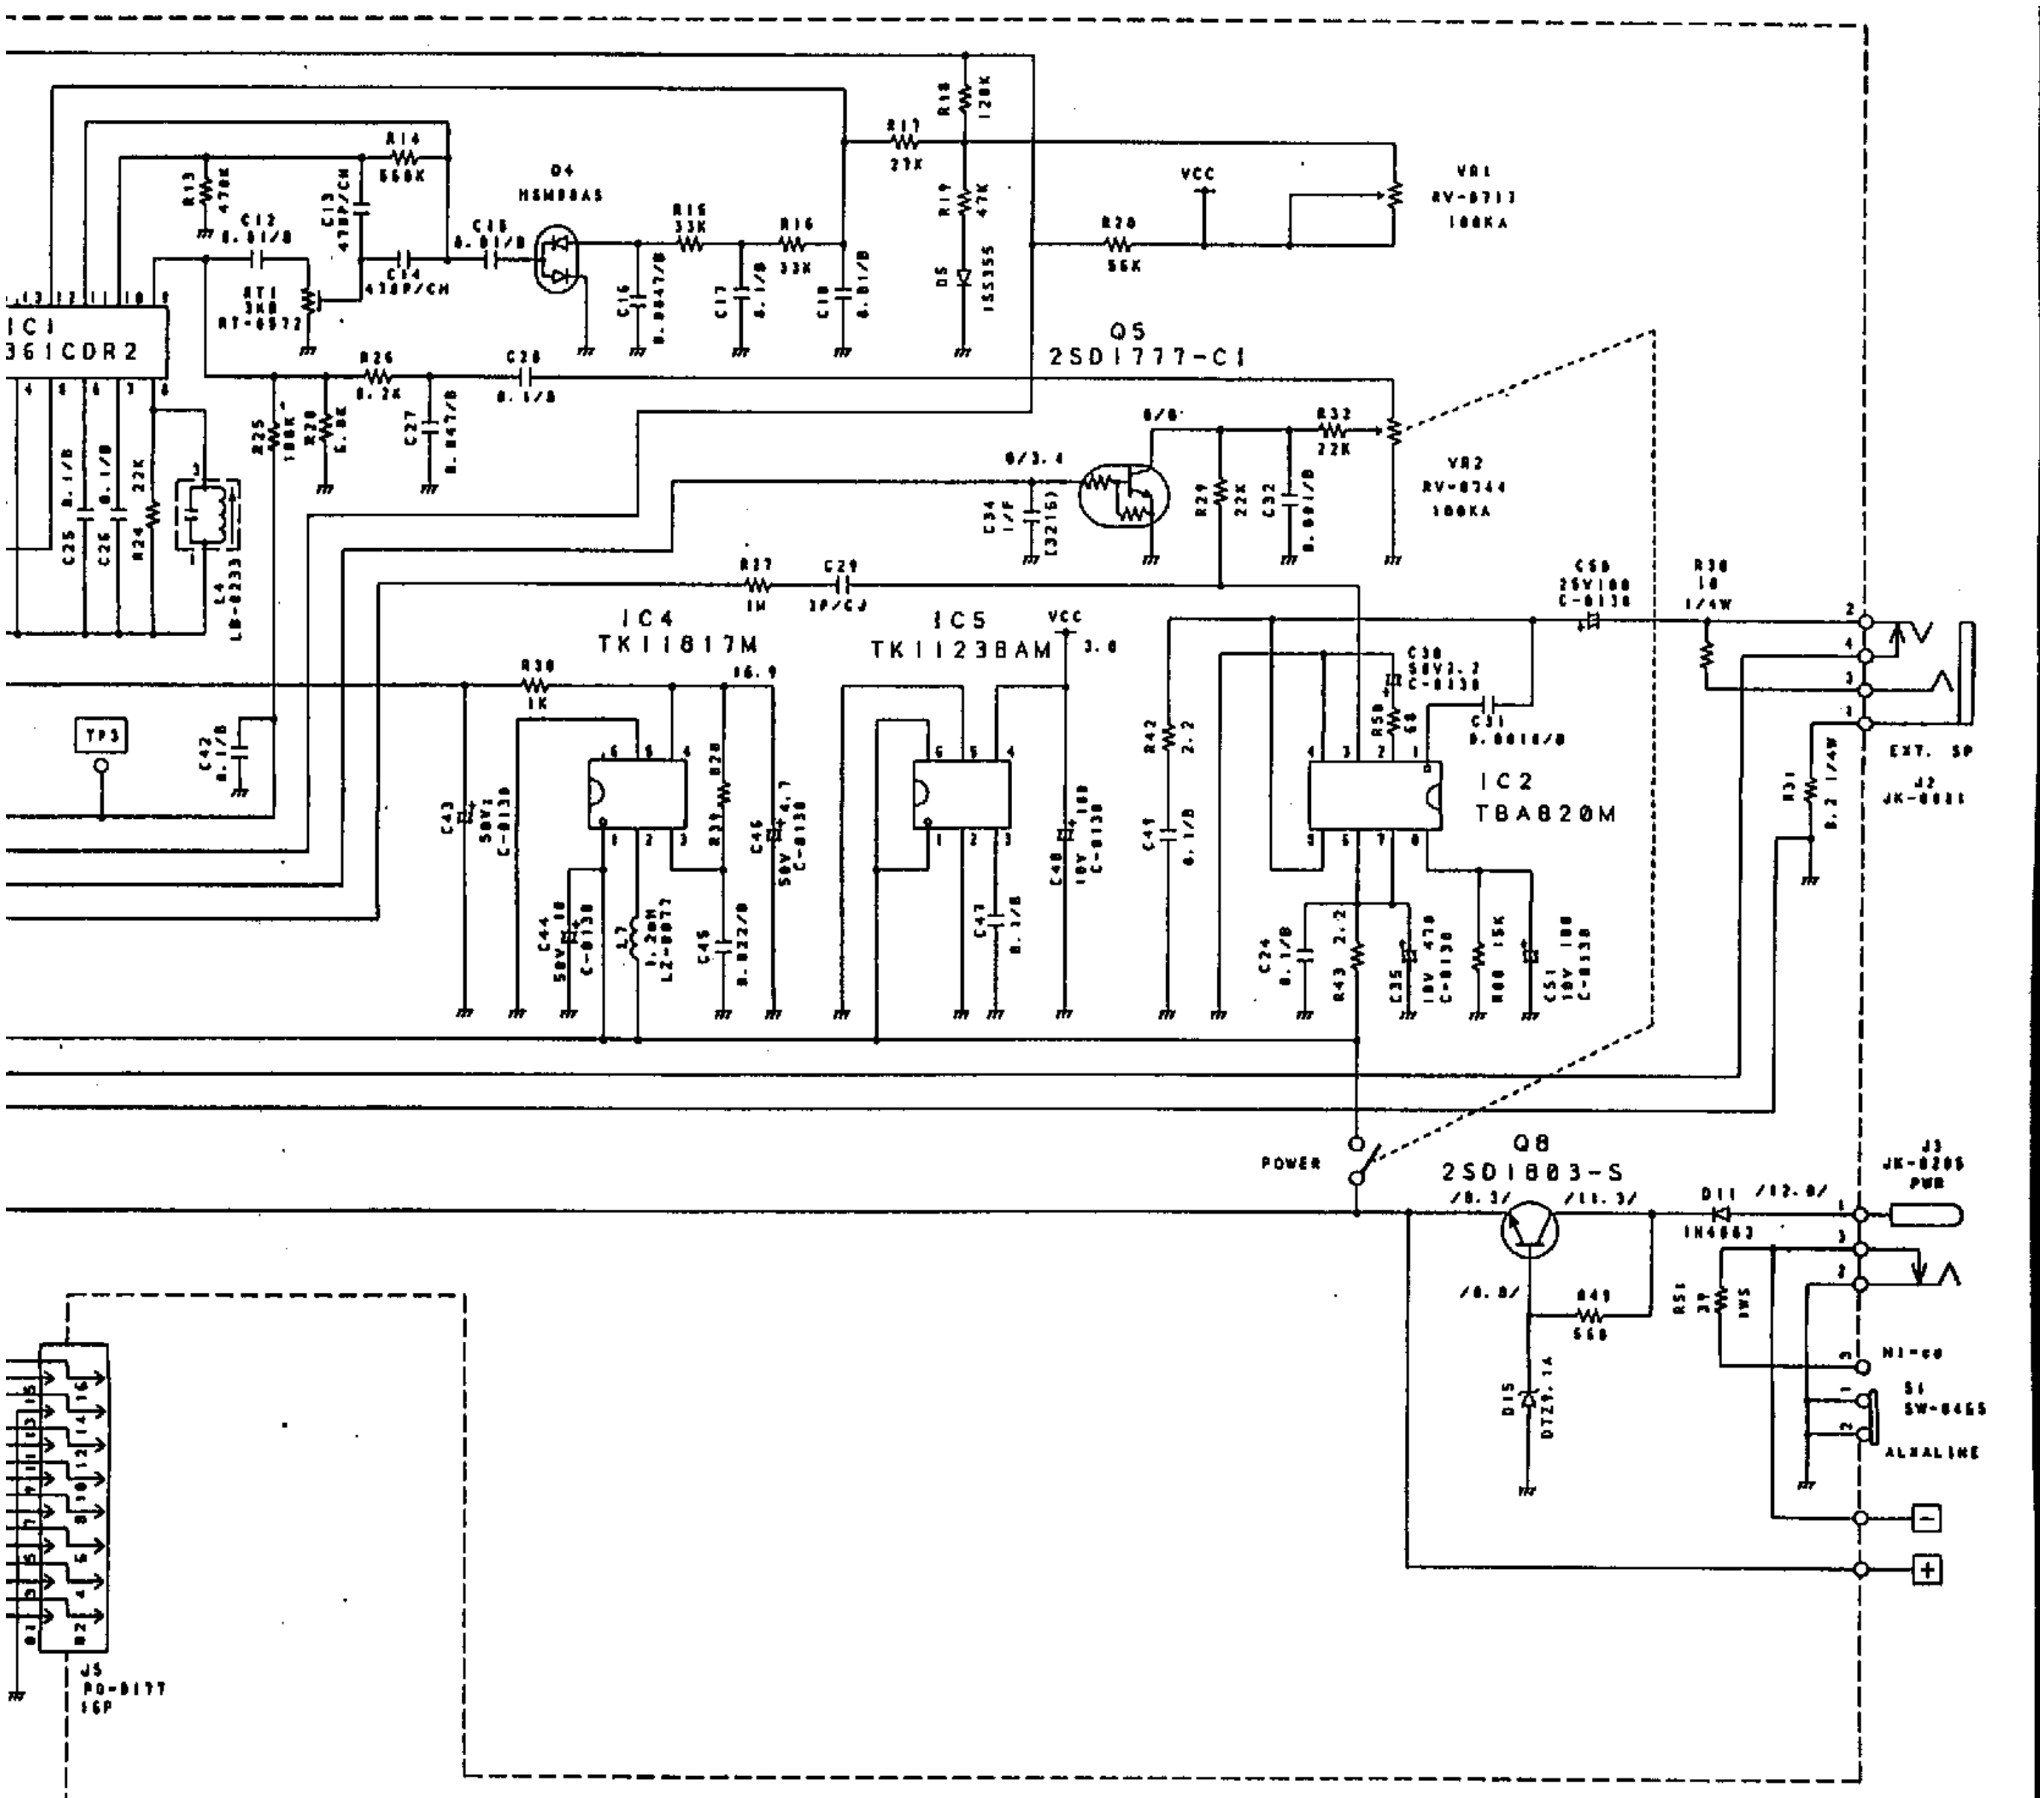


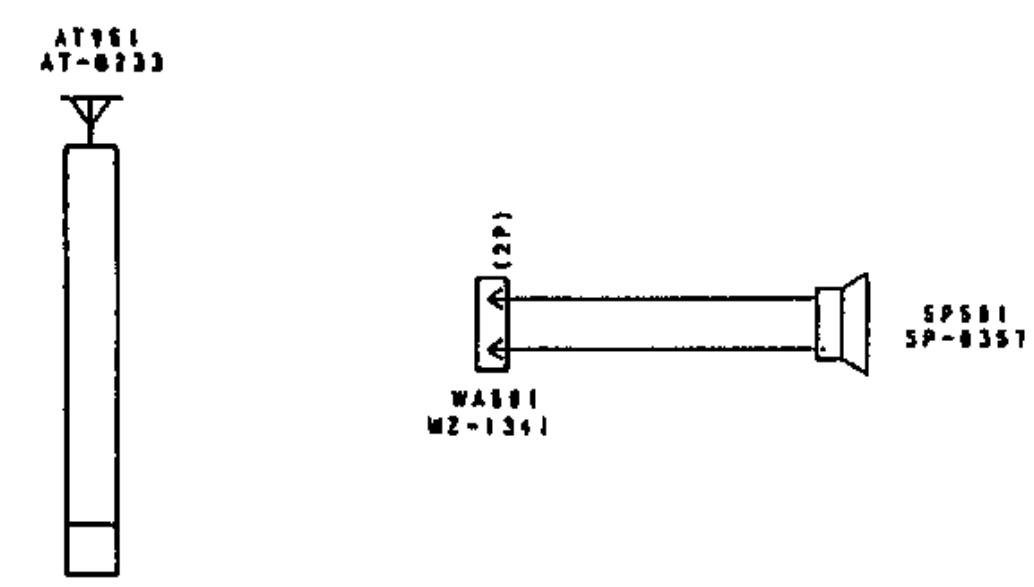

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE [1/16W] UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
4. CHIP PARTS ARE NOT SPECIFIED IN THIS DRAWING PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.
5. VOLTAGE IN [ ] SHOWS UHF BAND CONDITIONS.
6. VOLTAGE IN ( ) SHOWS VHI LOW BAND CONDITIONS.
7. VOLTAGE IN NO MARK SHOWS VHI HIGH BAND CONDITIONS.
8. VOLTAGE IN / / SHOWS SUPPLY 12 VDC AT POWER JACK CONDITIONS.
9. VOLTAGE IN / SHOWS UNSQUELCHED / SQUELCHED CONDITIONS.

AE65H

DESIGN	DRAWN. BY	UNIDEN No.	MODEL No.
'96. 6. 12	'96. 8. 14	UB-257A	½
Y. HOSHI	Y. HOSHI	TITLE. MAIN' PCB SCHEMATIC DIAGRAM	
CHECK. BY	APPRO. BY		
	[signature]	DRAWING No. E12-4814	
REV. No		UNIDEN CORP.	

参 考 资 料
REF. ONLY